

Date

Project


Type

Comments

DESCRIPTION

Series 18 LED Wall Mount is a slim-profile rectilinear form scaled to complement any interior architecture. The luminaire uses mid-power LEDs for long life and enhanced performance. This Product is enrolled in the International Living Future Institute (ILFI) Declare 2.0 Program and is third-party verified with options achieving Red List Approved and Declared status.

ORDERING GUIDE: *Sample Number: S18 LED WM ID - CS - 32' - 2E - B - 8 - TW - FTO - 120V - SC - SUR - EE - RLA*

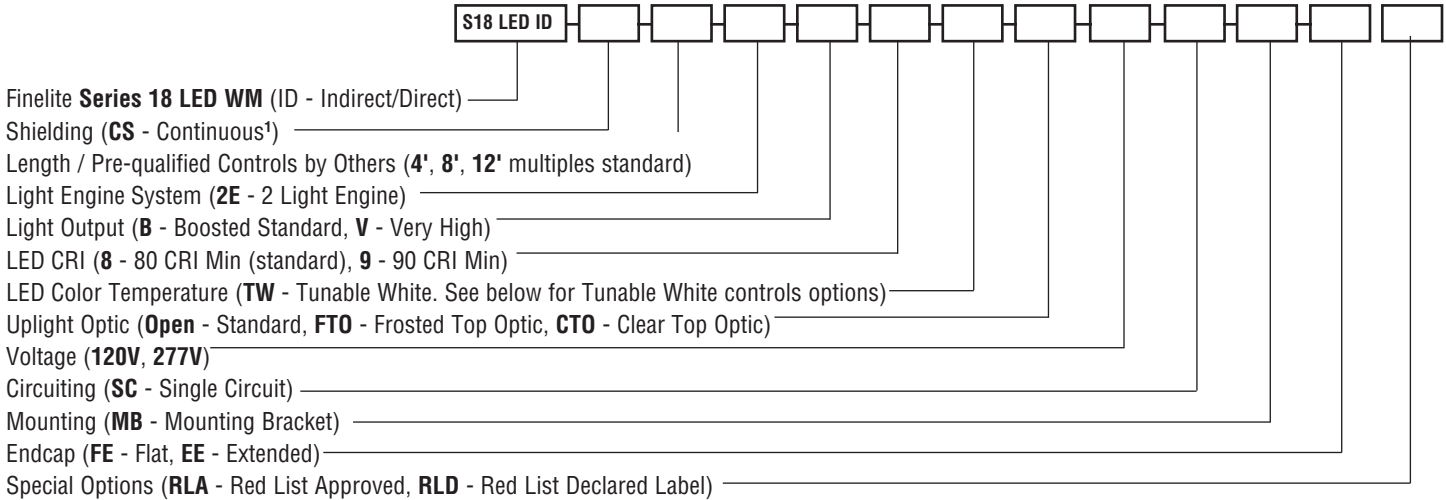

¹Continuous shielding is standard with a maximum 8' length. Visible diffuse area is 7'9" centered on a 8' housing. Available with LED only.


TUNABLE WHITE CONTROLS OPTIONS: SELECT ONE

Controls by others with pre-qualified DMX driver
 Controls by others with pre-qualified DALI driver
 Controls by Lutron with pre-qualified Lutron driver

A brand of **legrand**

Finelite, Inc. • 30500 Whipple Road • Union City, CA 94587-1530 • (510) 441-1100 • www.finelite.com

LUMINAIRE FEATURES




DIMENSIONS AND LIGHT ENGINE

Two replaceable light engines with mid-power LEDs provide excellent distribution for the uplight and downlight.

8' Standard Continuous Shielding (CS)*




4' Shielding



SHIELDING


Continuous shielding is standard with a maximum 8' length. The visible diffuse area is 7'9" centered on a 8' housing.

TUNABLE WHITE FEATURES

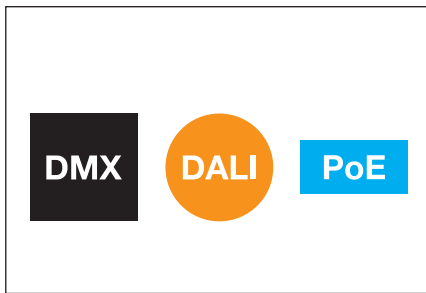

MULTIPLE CONTROL ARCHITECTURES

Qualified DMX, DALI (open and proprietary), or PoE (Power over Ethernet).

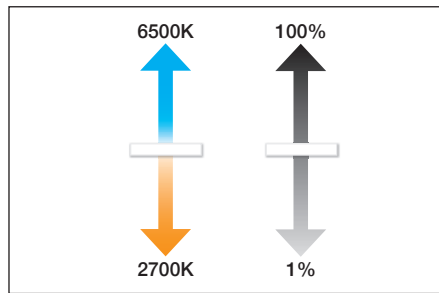

TUNABLE WHITE

Any CCT between 2700K and 6500K with excellent CRI and R9 values; dimming from 100% to 1%.

PHOTOMETRY – 4' Luminaire

S18 LED-ID-DCO-2E-V


Very High Output (Open)

Total luminaire output: 4416 lumens (1104 lumens/foot)

Peak Candela Value: 1091 @ 125°

CCT: 3500K; CRI 80

Source Report: ITL 85168 (Family Correlation)



CANDLEPOWER SUMMARY						
	0	22.5	45.0	67.5	90.0	Flux
0	97	97	97	97	97	
5	96	96	96	96	96	9
15	93	93	94	94	94	26
25	86	86	87	88	88	40
35	76	76	78	78	78	48
45	64	64	65	66	65	50
55	50	50	51	51	50	45
65	34	34	35	34	34	34
75	18	19	19	18	18	20
85	4	5	5	4	4	5
90	0	0	0	0	0	
95	46	331	637	679	576	404
105	139	461	743	926	992	710
115	235	515	836	1007	1059	743
125	323	544	850	1038	1091	702
135	398	557	815	981	1041	595
145	459	555	759	892	935	456
155	502	547	676	773	809	308
165	530	539	592	637	656	169
175	543	543	544	548	549	23
180	544	544	544	544	544	

Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire	
B*	V**
2273	4416

Light Output, 3500K, 80 CRI (Lumens Per Foot)	
B*	V**
568	1104

Power, 3500K, 80 CRI (Watts Per Foot)	
B*	V**
5.1	10.2

Efficacy, 3500K, 80 CRI (Lumens Per Watt)	
B*	V**
112	108

B - Boosted Standard Output, V - Very High Output

* Family Correlation based on 4' luminaire 3500K Very High Output (V) test - 120V.

** Based on ITL report: 85168

Lumen Adjustment Factors - 80 CRI	
2700K	0.968
3000K	0.985
3500K	1.000
4000K	1.032
6500K	1.032

Lumen Adjustment Factors - 90 CRI	
2700K	0.731
3000K	0.746
3500K	0.760
4000K	0.789
6500K	0.789

Apply a lumen adjustment factor to calculate lumens for the desired CCT and CRI

SAMPLE LUMEN ADJUSTMENT CALCULATION

Boosted Standard Output (B), 4000K, 90 CRI

Lumen Adjustment Factor = 0.789

$$\text{Total Light Output} = 2273 \text{ lm} \times 0.789 = 1793 \text{ lm}$$

$$\text{Total Light Output per Foot} = 568 \text{ lm/ft} \times 0.789 = 448 \text{ lm/ft}$$

$$\text{watts/foot} = 5.1 \text{ W/ft}$$

$$\text{Efficacy} = \frac{448 \frac{\text{lm}}{\text{ft}}}{5.1 \frac{\text{W}}{\text{ft}}} = 89 \text{ lm/W}$$

A brand of **legrand**

FROSTED TOP OPTIC (FTO) - 4' Luminaire

Total Light Output, 3500K, 80 CRI (Lumens) - 4' Luminaire	
B*	V**
1972	3831

Light Output, 3500K, 80 CRI (Lumens Per Foot)	
B*	V**
493	958

Power, 3500K, 80 CRI (Watts Per Foot)	
B*	V**
5.1	10.2

Efficacy, 3500K, 80 CRI (Lumens Per Watt)	
B*	V**
97	94

B - Boosted Standard Output, V - Very High Output

* Family Correlation based on 4' luminaire 3500K Very High Output (V) test - 120V.
** Based on ITL report: 85168

Lumen Adjustment Factors - 80 CRI	
2700K	0.968
3000K	0.985
3500K	1.000
4000K	1.032
6500K	1.032

Lumen Adjustment Factors - 90 CRI	
2700K	0.731
3000K	0.746
3500K	0.760
4000K	0.789
6500K	0.789

Apply a lumen adjustment factor to calculate lumens for the desired CCT and CRI

**SAMPLE LUMEN
ADJUSTMENT CALCULATION**

Boosted Standard Output (B), 4000K, 90 CRI

Lumen Adjustment Factor = 0.789

*Total Light Output =
1972 lm x 0.789 = 1555 lm*

*Total Light Output per Foot =
493 lm/ft x 0.789 = 388 lm/ft*

watts/foot = 5.1 W/ft

$$Efficacy = \frac{388 \frac{lm}{ft}}{5.1 \frac{W}{ft}} = 76 \text{ lm/W}$$

SPECIFICATIONS

CONSTRUCTION: Body is 20-gauge die-formed steel with an 18-gauge die-formed internal joiner system. Plug-together wiring standard. All components are hard-tooled to tolerances of +/- 0.010".

ENDCAPS: The Flat Endcap (FE) is standard and made of 20-gauge die-formed steel adding 0.10" at each end. The optional Extended Endcap (EE) is an aluminum die-cast endcap and adds 0.55" at each end.

REFLECTORS: Die-formed 24-gauge cold-rolled steel reflectors finished in 96LG High Reflectance white powder coat paint.

UPLIGHT OPTICS: The 2E optical system is open, standard. Optional Frosted Top Optic (FTO) and Clear Top Optic (CTO), available.

SHIELDING: Diffusers are 73% transmissive with 99% diffusion. Luminaires are available with two distinct shielding options:

- CS Continuous Shielding (CS) is standard with a maximum 8' length. The visible diffuse area is 7'9" centered on an 8' housing.

LIGHT OUTPUT: Two lumen packages available, Boosted Standard (B) and Very High (V). A separate chart summarizes lumen distribution and wattage. Light engines are replaceable.

LUMEN MAINTENANCE: 90% of initial light output (L90) at 100,000+ hours; 70% of initial light output (L70) at 200,000+ hours.

TUNABLE WHITE DRIVER: High Performance DMX LED driver. Driver is fully accessible from below ceiling. 120/277V. Power factor ≥0.90. Total Harmonic Distortion (THD): <20%. Dimming Range: 100 - 1%. Expected driver lifetime: 100,000 hours.

TUNABLE WHITE PRE-QUALIFIED DRIVERS BY OTHERS

DMX	DALI	POE set up	LUTRON
EldoLED	EldoLED	Contact Factory	LUTRON

NOTE: For a complete list of system option/limitations [please click here](#).

LUTRON DRIVER OPTIONS: LUT-TW - Lutron LD2 Dalı-2 1%, Tunable White.

ELECTRICAL:

Emergency Option DMX: Battery backup only.

Emergency Option DALI: Battery backup, optional emergency-to-generator/inverter wiring

Emergency Option LUTRON: Battery backup, optional emergency-to-generator/inverter wiring.

Emergency Option PoE: Contact Factory.

Battery Backup: Factory-choice battery pack available; 4' minimum fixture length. Factory-choice low-profile backup battery also available; 8' minimum fixture length. Backup batteries deliver 2208 lumens. A 4' section will be illuminated in emergency mode. Backup battery will operate at 6500K in emergency.

DMX MOUNTING: For grid ceiling applications the dual GridBox™ mounting is supplied (standard). For hard ceiling applications the ceiling mounting box is supplied (standard). DMX feeds cannot be cut or spliced. DMX feeds should be ordered based on fixed lengths. Available DMX pendant feed lengths are 5', 12', and 30' (5' standard.)

DMX INTERCONNECTION CABLES: Luminaires are prewired with plug-and-play interconnected cables to support easy plug-together joining of fixture runs. DMX to RJ45 adapters and an RJ45 terminator for every 32 DMX drivers are included.

MOUNTING: Mounting Brackets (MB) in 4' and 8' lengths attach to the wall and the fixture hangs on the bracket 0.5" off the wall. The mounting bracket is concealed behind the fixture.

FINISHES: Finelite Signal White powder coat standard. Optional Adders: 179 Tiger Drylac's non-metallic RAL colors.

FEED: Standard with one 18-gauge single-circuit feed. 14-gauge feed used when fixture current exceeds 5 amps. DMX and power feed at same location (standard). DMX feeds cannot be cut or spliced. DMX feeds should be ordered based on fixed lengths.

LENGTHS / PRE-QUALIFIED CONTROLS BY OTHERS: 4', 8', and 12' sections can be combined to make longer runs.

LABELS: Fixture and electrical components are ETL-listed conforming to UL 1598 in the U.S.A. and CAN/CSA C22.2 No. 250.0 in Canada. In accordance with NEC Code 410.73 (G), this luminaire contains an internal driver disconnect. Damp Location. Finelite products use electronic components that are RoHS compliant, and the mechanical components of the luminaire have been verified to not knowingly contain any restricted substances listed per RoHS Directive 2011/65/EU. Finelite makes the specification process easy when putting healthier products on your projects. Simply add – RLA (Red List Approved) or – RLD (Declared Label) to your part number.

WEIGHT: 2.5 lb/ft.

WARRANTY: 10-year performance-based warranty on all standard components. Qualified drivers by others and optional accessories such as emergency battery packs are covered by their individual manufacturer warranties.