



Declare.



HP-3

Sweet Spot for Your Project



HP-3 Indirect/Direct

HP-3 is a 3-inch-wide linear luminaire with recycled aluminum housing, advanced optics, and mid-power LEDs, achieving 90% of its initial light output at over 100,000 hours. It features an innovative luminaire assembly, an easy joiner for continuous runs, and seamless installation. Backed by a 10-year warranty, it also offers 179 RAL color options for any project.

Declare 2.0

This product is enrolled in the International Living Future Institute (ILFI) Declare 2.0 Program and is third-party verified.



Features

Tailored Output

Optimizing lighting levels to accommodate architectural design elements and code requirements.

- Standard (**S**)
- Boosted Standard (**B**)
- High (**H**)
- Very High (**V**)

Features

Tailored Color

Adjust intensity to the preferences of the people in the space.

- Static White options at 3000K, 3500K, and 4000K CCT
- 80+ and 90+ CRI options available

Features

Tailored Lengths

Enhance architectural interiors with perfectly sized luminaires

- Minimum section length is 2' and maximum is 12'
- Tailored increments of 1/16"

Features

Tailored Control


Dim and tune the lighting to fit user preference.

- Dimming from 100% to 10%, standard; 1% available
- Industry-leading pre-qualified drivers and control options available
- Integrated or networked daylight and occupancy sensor options are available




HP-3 Uplight Optic Options


Flush

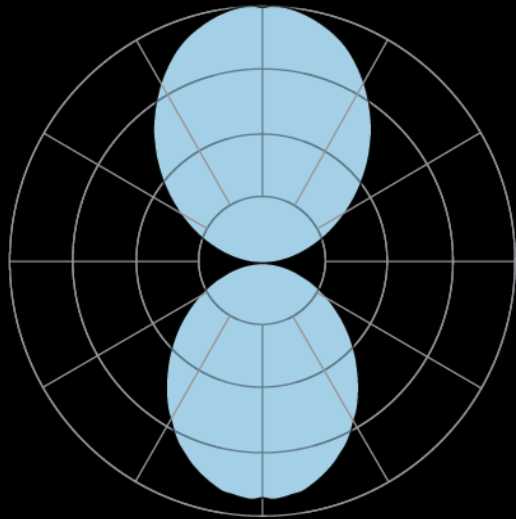

Wide Spread Optic

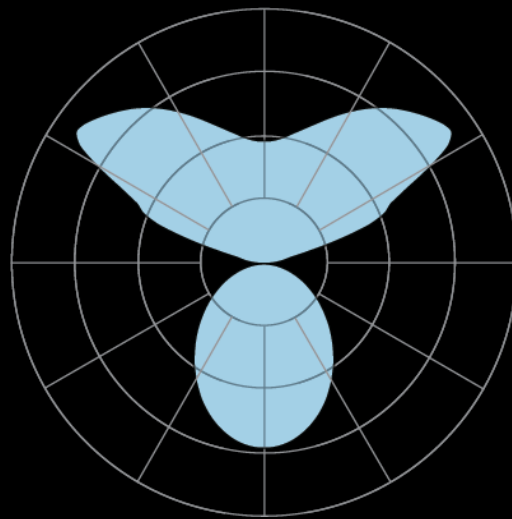

Asymmetric Optic

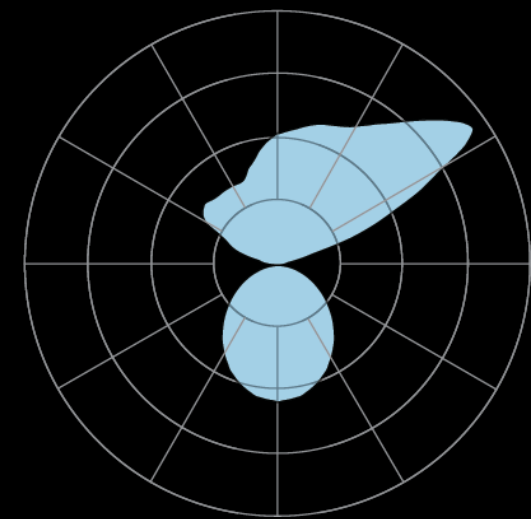

HP-3 New Joint Mechanism

Simplify your installation with our innovative Joiner Mechanism. Designed with the contractor in mind, this user-friendly solution streamlines installation, reduces labor costs, and accelerates project timelines.



Performance

HP3-P-ID-4'-V-V-835-F-F

Uplight: Flush/ Downlight: Flush

Distribution: 46% Up (V) / 54% Down (V)

Efficacy: 132 lm/W

Uplight: 4159 lumens (1040 lumens/foot)

Downlight: 4883 lumens (1221 lumens/foot)

Total luminaire output: 9042 lumens (2261 lm/ft)



68.68 watts (17.1 W/ft)

CRI: 80 / CCT: 3500K

NLTL LM79 Report # REP-071124-09

Note

- For complete photometric and Tunable White data please see technical sheet.

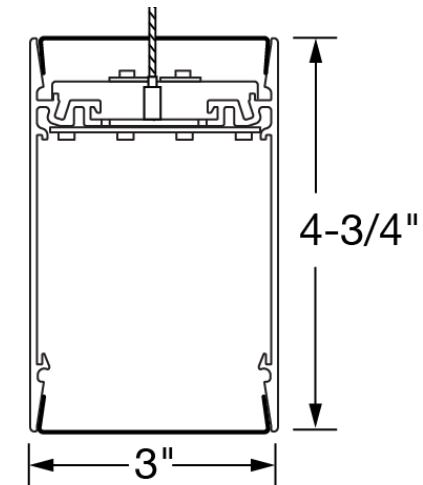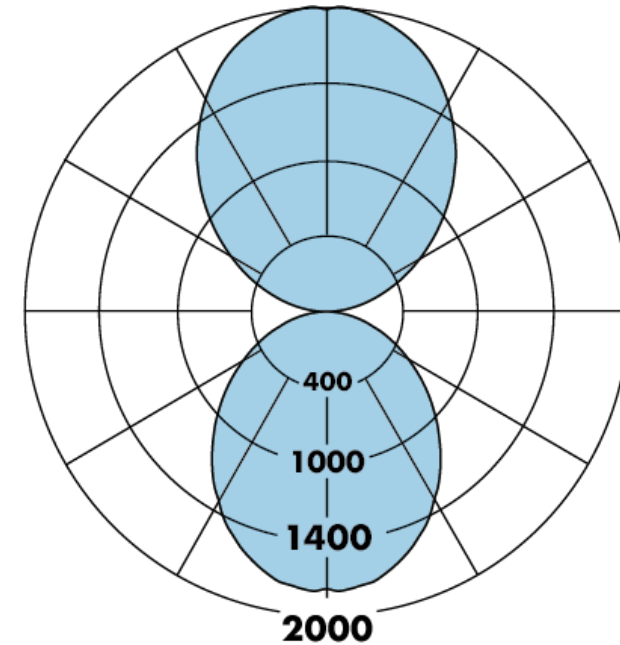



The Finelite LED Difference



10-year performance-based warranty



Ships in 10 working days for standard orders



Tailored Lighting



Buy American Act Compliance